
UHPPOTE

HBK-B01

DOORBELL CHIME

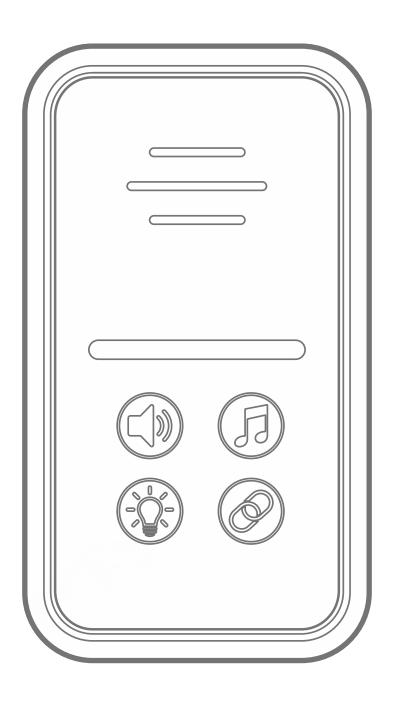

USER MANUAL


Safety Instruction

Thanks for purchasing this product. In order to use this product safely and correctly, please read this manual carefully before use.

Features

- For indoor use only.
- There are 5 volume levels, and the maximum volume is 91dB.
- 5 ringtones to choose from.
- 7 indicator colors available: red, green, blue, white, yellow, purple, cyan.
- Simple pairing operation.

Getting to Know the HBK-B01

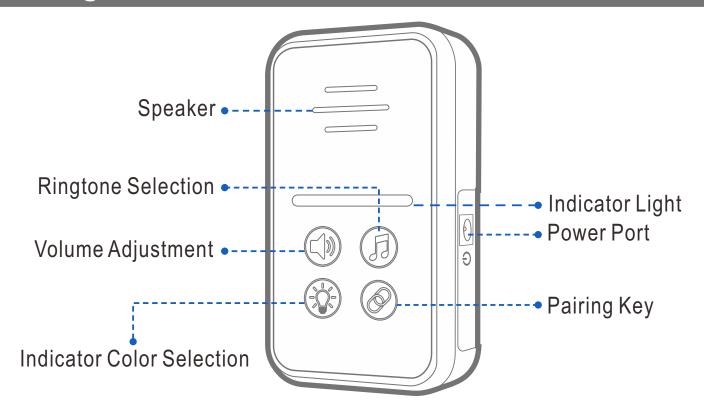

Specifications

Input Voltage	12VDC (Plug-in)
Volume	91dB Max.
Panel Material	PC
RF Frequency	433.92MHz
Operating Environment	Indoor
Enclosure Material	ABS Plastic
Ambient Humidity	0%RH-95%RH (Non-condensing)
Ambient Temperature	-22°Fto140°F
Operating Distance	164 feet without block
Dimensions	4-9/32"x 2-15/32"x 63/64" [108.8x62.8x25mm]

Pairing and Unpairing


- Simply tap the pairing key to enter pairing mode.
- If you need to unpair this doorbell, please tap and hold the pairing key for 8 seconds.

Package Content


After opening the package, please make sure the device is in good condition and confirm whether the following accessories are complete or not.



HBK-B01 x1



Accessories Package x1



Adapter x1




User Manual x1


Installation

- Drill 2 holes on the wall for the self-tapping screws.
- Put the supplied plastic anchors into the 2 holes.
- Screw the self-tapping screws into the 2 plastic anchors.
- Hang the doorbell chime on the 2 screws.
- Apply power to the doorbell chime.

Figure 1
Hole locations

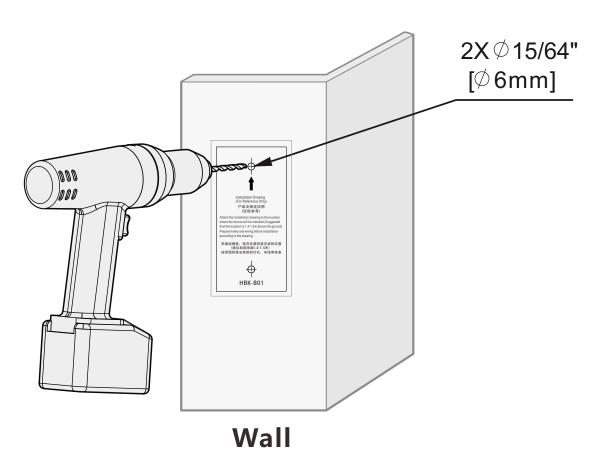



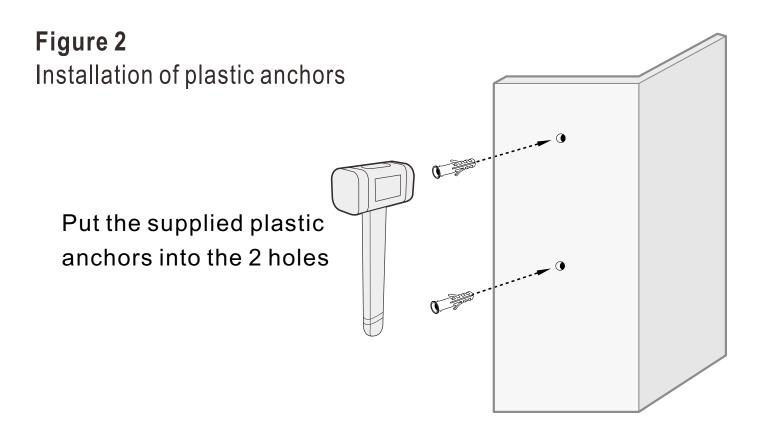

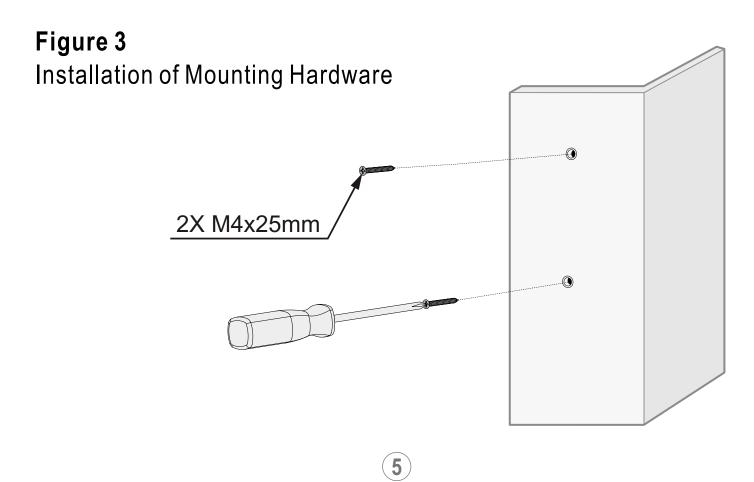


Figure 4
Installation of HBK-B01


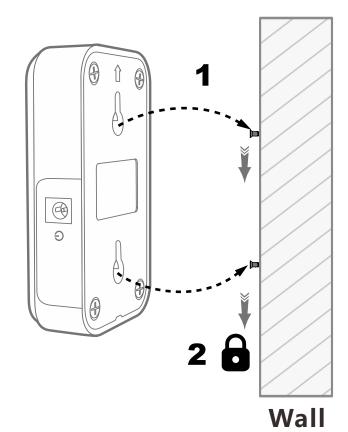


Figure 5
Power on the device



UHPPOTE

© 2025 HOBK Electronic Technology Co., Ltd All rights reserved

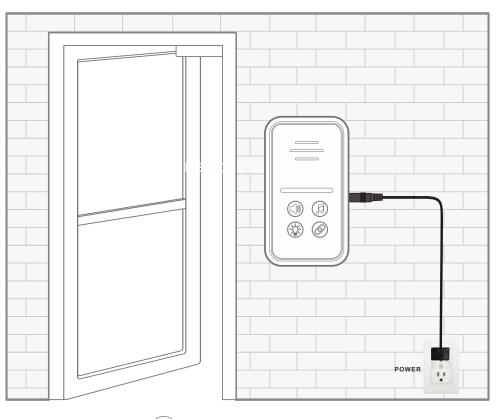

>75% recycled paper

Produced By HOBK